

CHAINS

RESTORED CORNER FOR OREGON STATE BOARD OF FORESTRY

One Quarter corner common to Sections 6 and 7, T1S, R7W, W.M., Tillamook County, Oregon

ORIGINAL

Basalt stone, 8" x 14" x 16" (now in place with 1/4 visible on W. face) from which a:

50" Fir bears N48W 16 lks.; now 48" stump, scribes 1/4 S visible, lower face unexposed.

40" Fir bears S60W 82 lks.; now 43" stump, face unexposed.

RESTORED

Var. 21 1/2 E

Erected mound of stone around original 1/4 corner stone, from which a:


46" Fir stump bears N77E 45.9 ft.; scribed 1/4 S6 BT RS 401.

22" Fir snag bears S48E 48.5 ft.; scribed 1/4 S7 BT.


Oregon State Board of Forestry metal location poster on 46" Fir stump BT. Set 4" x 4" x 60" white painted cedar post 2.0 Ft. S.W. of stone.

Dated May 12, 1958

Restored by

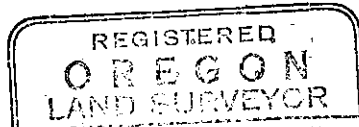

*Richard A. Morris*

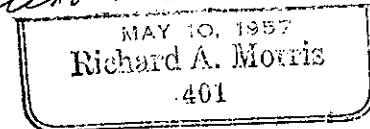

Present and witnessed by Robert Sturm  
Harold Russell

Book I

326

326

326