

### CORNER INVESTIGATION REPORT

FS INDEX ID: Z-2 & A-2

CORNER: W 1/16 GCDB ID: 120100 & 120700 DATE: 6/20/2018  
TOWNSHIP: 3 S & 4 S STATE: OREGON  
RANGE: 8 W COUNTY: TILLAMOOK  
SECTION: 31 & 6 FOREST: SIUSLAW  
MERIDIAN: WILLAMETTE DISTRICT: HEBO

NFSL PROPERTY BOUNDARY CORNER?:  YES  NO

LINE(S) POSTED: NORTH - NONE WEST - 2018

MAINTAINED:

GUARD POST(S): EAST - 3.6 FT SOUTH - 1.2 FT

CORNER HISTORY:

- (1) FOUND UNRECORDED GALVANIZED IRON PIPE, ESTABLISHED CORNER, SET ALUMINUM PIPE/CAP & 2 BT'S.
- (2) FOUND ALUMINUM PIPE/CAP & 2 BT'S.

MONUMENT FOUND/SET:

FOUND 2-1/2" ALUMINUM PIPE WITH A 3-1/4" ALUMINUM CAP, PROJECTING 9 INCHES ABOVE THE GROUND.

RECORD CORNER ACCESSORIES:

- A 1" IRON PIPE ALONGSIDE ALUMINUM PIPE.
- 36" FIR SNAG BEARS, S74°15'E - 24.2 FT, 25 FT TALL, WITH A HEALED SINGLE BLAZE.
- A 52" FIR BEARS, S60°30'W - 34.6 FT, WITH A HEALED SINGLE BLAZE.

NEW CORNER ACCESSORIES:

- A 9" FIR BEARS, N31°W - 12.1 FT, MARKED "X" "BT" ON A DOUBLE BLAZE.
- NEW BT'S INCLUDE A 3/4" BRASS WASHER NAILED BETWEEN "B" & "T" SCRIBES.

CORNER MAINTENANCE/OTHER INFO:

CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S, BT FACES & A 6" BAND AT HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS ARE AT BREST HEIGHT.

NFSL LINES BEAR: (2)N89°19'18"E - 514.66 FT & (1)N0°31'35"E - 2606.18 FT  
NOTE: MEASURED DISTANCE CCC S31/S6 TO W1/16 S31/S6 IS 514.80 FT

GEODETIC COORDINATES:

LATITUDE: N 45° 15' 29.893"  
LONGITUDE: W 123° 43' 17.101"  
ELLIPSOID HEIGHT:  
DATUM: WGS 84

DOCUMENTS ON FILE AT:

WILLAMETTE NATIONAL FOREST  
3106 PIERCE PARKWAY, STE D  
SPRINGFIELD, OREGON 97477

SOURCE: USGS QUAD MAP, FOR NAVIGATION TO CORNER.

DATE OF INVESTIGATION: 1/8/2018

REPORT BY: JONATHAN B. DREW II, PLS#89396

ASSISTED BY: JONATHAN B. DREW II, PLS# 89396  
WAVERLY K. HAYNER, BLM SURVEY TECH  
MICHAEL E. HUCK, BLM SURVEY TECH  
LOWELL PEARSON, BLM SURVEY TECH

HISTORY OF VISITATIONS:

- (1)1981 - L. HUNNEMULLER, CSF# B-963
- (2)1984 - J. PROCHNAU, CSF# B-1173, B-1175 & B-1176

REGISTERED PROFESSIONAL LAND SURVEYOR

*Jonathan B. Drew II*

OREGON  
DECEMBER 3, 2014  
JONATHAN B. DREW II  
89396

EXPIRES: 6/30/2021


RECORD MEASUREMENTS:

- (1)S53°30'W - 0.11 FT
- (1&2)S75°E - 25.0 FT
- (1&2)S60°W - 34.6 FT

METHOD OF MEASUREMENT:

TRIMBLE S7 TOTAL STATION, OPEN TRAVERSE BETWEEN THIS CORNER & THE CCC CORNER FOR SECTION 6, T4S, AND SECTION 31, T3S, HOLD RECORD BEARING, (1)S89°19'18"W, BETWEEN CORNERS FOR BASIS. BEARINGS TO CENTER, DISTANCE TO ALUMINUM NAIL AT SIDE CENTER.

CAP DIAGRAM:

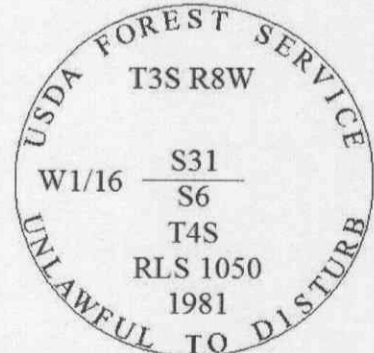

THIS DOCUMENT FILED IN CS OFFICE: YES

OTHER DOCUMENT FILED WITH CS: RECORD OF SURVEY

