

**CORNER INVESTIGATION REPORT**

FS INDEX ID: C-21

CORNER: 1/4 GCDB ID: 640600 DATE: 12/4/2019  
 TOWNSHIP: 3 S STATE: OREGON  
 RANGE: 9 W COUNTY: TILLAMOOK  
 SECTION: 1 & 2 FOREST: SIUSLAW  
 MERIDIAN: WILLAMETTE DISTRICT: HEBO  
 NFSL PROPERTY BOUNDARY CORNER?:  YES  NO  
 LINE(S) POSTED: EAST - NONE SOUTH - 1991  
 MAINTAINED: EAST - NONE SOUTH - 2019  
 GUARD POST(S): EAST - NONE SOUTH - 1.4 FT

HISTORY OF VISITATIONS:

- (1)1896 - L. WILKES, GLO SURVEY
- (2)1959 - M. WHITMORE, PER (3) & USFS RECORD
- (3)1962 - L.M. ROSEBERRY, BLM SURVEY
- (4)1966 - H. RUSSELL, CS A-1346
- (5)1967 - H. RUSSELL, CS B-564
- (6)1990 - F. JOHNSON, USFS RECORD
- (7)1991 - L. BISHOP, CS# B-1510

CORNER HISTORY:

- (1) ESTABLISHED CORNER, MARKED 6" ALDER FOR CORNER WITH 2 BT'S.
- (2) FOUND 1 LIVE BT (NE), SET VINE MAPLE POST WITH 2 NEW BT'S.
- (3) FOUND VINE MAPLE POST WITH 4 BT'S, SET IRON PIPE/BRASS CAP & 1 NEW BT.
- (4,5) FOUND "UNITED STATES CADASTRAL PIPE & CAP"
- (6) FOUND 2 BT'S BY WHITMORE, DOES NOT FIND BLM MONUMENT OR BLM BT'S.
- (7) FOUND 2 BT'S, SET ALUMINUM PIPE/CAP FOR CORNER & RM WITH 3 NEW BT'S.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Jonathan B. Drew II*

OREGON  
DECEMBER 3, 2014  
JONATHAN B. DREW II  
89396

MONUMENT FOUND/SET:

FOUND A 2-1/2" ALUMINUM PIPE WITH A 3-1/4" ALUMINUM CAP, PROJECTING 1 INCH ABOVE THE GROUND.

EXPIRES: 6/30/2021

RECORD MEASUREMENTS:

RECORD CORNER ACCESSORIES:

- \*NOT LOCATED: A (1)12" FIR, (2,3)13", (7)GONE
- \*NOT LOCATED: A (1)10" ALDER, (3)18" UPROOTED/ROTTED, (7)GONE
- \*NOT LOCATED: A (2)60" DEAD CEDAR, (3)70", (7)70" SAWED ROTTED SNAG
- \*NOT LOCATED: A (2)16" FIR, (3)16", (7)40" SAWED STUMP
- \*NOT LOCATED: A (3)10" CEDAR, (7)GONE
- A 17" FIR WITH A HEALED SINGLE BLAZE.
- A 15" FIR WITH A HEALED SINGLE BLAZE.
- \*NOT LOCATED: A (7)10" FIR
- \*NOT LOCATED: A (7)ALUMINUM PIPE/CAP FOR RM

- (1,2,3)N1°E - 4.95 FT
- (1,3)N82°W - 9.24 FT
- (2,7)S78°E - 50.0 FT, (3)S78°E - 50.16 FT
- (2)S60°W - 19.5 FT, (3)S60°W - 19.47 FT,
- (7)S66°W - 19.5 FT
- (3)N16°E - 15.18 FT
- (7)N56°15'W - 27.4 FT
- (7)S88°45'W - 31.5 FT
- (7)S13°W - 32.2 FT
- (7)S3°38' E - 47.10 FT

NEW CORNER ACCESSORIES:


NO NEW ACCESSORIES ADDED.

METHOD OF MEASUREMENT:

NO NEW MEASUREMENTS TAKEN,  
FILED AS CONDITION REPORT.

CORNER MAINTENANCE/OTHER INFO:

CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S. BT FACES & A 6" BAND AT HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS ARE AT BREST HEIGHT.  
 \*NOTE: CORNER NOTES NOT ON HAND DURING VISIT.  
 NFSL LINES BEAR: (7)S2°12'33"W - 1349.46 FT

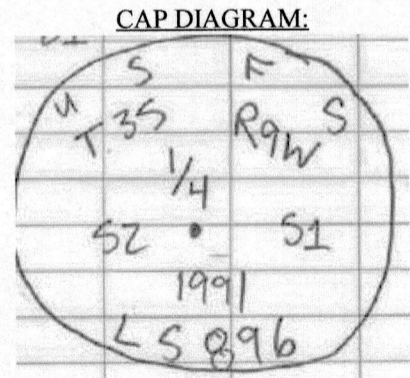

GEODETIC COORDINATES:

LATITUDE: N 45° 20' 15.940"  
 LONGITUDE: W 123° 44' 30.925"  
 ELLIPSOID HEIGHT:  
 DATUM: WGS 84

DOCUMENTS ON FILE AT:

WILLAMETTE NATIONAL FOREST  
 3106 PIERCE PARKWAY, STE D  
 SPRINGFIELD, OREGON 97477

SOURCE: USFS OWNERSHIP GIS LAYER, FOR NAVIGATION TO CORNER.

DATE OF INVESTIGATION: 8/19/2019

REPORT BY: JONATHAN B. DREW II, PLS# 89396

ASSISTED BY: ANDREW HILLMAN, USFS SURVEY TECH  
 CHRISTIAN HUNTER, USFS SURVEYOR TRAINEE

THIS DOCUMENT FILED IN CS OFFICE: YES  
 OTHER DOCUMENT FILED WITH CS: NONE

